

ZEOSORB

ZEOSORB IS AN ABSOLUTE REPLACEMENT OF SAND

INTRODUCTION

ZEOSORB® has been introduced to the process purification of drinking water and wastewater due to its large specific surface area and the selective adsorption of substances, such as ammonia, dissolved organic matter and many other substances. Moreover, **ZEOSORB**® has advantageous hydraulic properties, that is - the filtration capacity of large quantities of water. Compared with other adsorbents, **ZEOSORB**® is more stable, has better filter features, accessible and relatively cheaper.

Based on numerous studies, it can be concluded that **ZEOSORB**® has great potential as effective adsorbent in numerous processes of purification of drinking water and wastewater, such as water softening, the removal of ammonia (from municipal wastewater, wastewater from livestock farms, the barn manure, water from ponds and swimming pools), the removal of nitrogen, the removal of dissolved organic matter and colour, the removal of heavy metals (from natural water, acid mine water, industrial wastewater), the removal of radioactive substances from wastewater, desalination seawater and many others.

ZEOSORB® performs as polyfunctional sorbent in the wastewater treatment process and it binds a number of harmful components. However, it does not possess the ability of anions adsorption due to negative charge of its aluminosilicate network. Superficial modification of **ZEOSORB**® by means of organic modifiers, allows partial neutralization of negative charge of external surface of **ZEOSORB**® media.

ZEOSORB® is 100% Natural Aluminosilicate (Zeolite) Mineral.

FEATURES

- Excellent Filtration Up To 3 Microns
- Large Surface Area (> 270 m²/gram)
- High Porosity & Loading Capacity
- High Efficiency Low Operating Cost
- Lifetime > 10 Years
- NSF/ANSI/CAN 61
NSF/ANSI/CAN 372





- FILTERSORB
- FILTRATION
- ADSORPTION INSTANT
- PRODUCTS OXY
- TREATMENT SYSTEMS



STRUCTURE AND PROPERTIES

ZEOSORB[®] is a high purity natural Aluminosilicate micro crystalline mineral. It is available in particle size of 0.5 - 1.0 mm (18x35 Mesh) or 1.5 - 2.5 mm (8x14 Mesh). The bulk weight is about 820 kg/m³. **ZEOSORB[®]** distributed by **Coastal Water Filters, Inc** has high porosity and high specific surface and it is resistant to abrasion. The **ZEOSORB[®]** media is classified as a GRAS (Generally Recognized As Safe) product. It is also listed under German Trinkwasserverordnung (TVO) 2011. Since the mid 2005, lab and field test data reports in the

SUMMARY OF PERFORMANCE TEST DATA FOR PRESSURE VESSELS

Filter Media	Filter rating (nominal)	Solids loading capacity
ZEOSORB [®] (18 x 35 mesh)	< 3 µm	~ 2.6x
Sand (20 x 40 mesh and Anthracite)	~ 20 µm	1x
Sand/Anthracite (20 x 40)	~ 15 µm	~ 1.4x
Multimedia	~ 12 µm	~ 1.6x

Similar results were observed for gravity beds. Some representative examples of high purity **ZEOSORB[®]** filter performance are provided below.

River water turbidity: **ZEOSORB[®]** versus multimedia media filtration tests were conducted for fine particle (turbidity) removal from river water. Pressure vessels (18" diameter) were operated with a service flow of 36.7 m³/h of bed area for six consecutive days and turbidity (NTU) was measured in the feed and filtered water. The filtered water average NTU was approximately 1/3 of the multimedia filtrate, indicating superior fine particle removal by **ZEOSORB[®]**.

ABSOLUTE REPLACEMENT TO SAND & MULTIMEDIA



Bottled water plant: A bottled water plant pumped groundwater to four 48" diameter pressure vessels that feed two RO units. The multimedia reduced the well water SDI by an average 5% compared to 45% to 50% SDI reduction for the **ZEOSORB[®]** media.

Cooling tower makeup water: A major chemical plant facility in USA had turbidity problems with river make-up water being used for a cooling tower. The sand/garnet gravity filter inadequately removed turbid particles after rain events. The sand/garnet was replaced with an equal volume (15.45 m³) of 0.5 x 1 mm **ZEOSORB[®]**. When operated at the same flow rate 6.1 m³/h, it removed greater than 98% of the turbidity against only 20% for the sand/garnet.

Produced water filtration: A German oil company wanted to convert unusable oil production water into irrigation water. The production water was processed for oil/water separation: chemical flocculation; clarification; and ozone oxidation. It was then filtered using two pressure vessels (72" diameter) with high purity **ZEOSORB[®]** media operating at approx. 29 m³/h. The filtrate was used directly as feed water for an RO unit and the product water was recycled as agricultural irrigation water.

Z EOSORB is a high-purity filter media that ensures
E many advantages
O ver conventional granular
S and, anthracite, multimedia and
O ther filter media products for
R emoval of suspended particles and Turbidity
B ackwash cycles and labor costs are reduced





Reverse Osmosis prefilter: An electric utility installed a 340 m3 water treatment facility with two multimedia filters and RO equipment to produce boiler make-up water. The RO units could not be operated due to filter vessel pressure loss problems and an elevated SDI in the filtrate. The two multimedia bed were replaced with equivalent bed volumes of 18x35 mesh high purity **ZEOSORB**® media and the strict design specifications for the RO feed water have been consistently met for over two years. Zeosorb is the ideal choice for filtration applications due to its combination of high-quality filtration capabilities and cost-effectiveness.

Prefilter for Granulated Activated Carbon: Municipal water supplied to restaurant contained elevated iron and other fine particles. Cartridge (5 µm) filters rapidly loaded and caused reduced water flow to the Granulated beds and chiller. A backwashing **ZEOSORB**® filter (10" diameter vessel with a 24" bed depth) was installed and tested by an independent engineer and technical consultant. The feed water had 0.1µm to 10µm particles (average SDI or slit density index = 4.3). The **ZEOSORB**® media bed effectively removed the iron particles. The product water particles were in the 0.1 µm to 2.3 µm range, with an average SDI = 0.

EXCELLENT FILTRATION

<3µ

EFFICIENTLY CLEAN

APPLICATIONS



Municipal
& Industrial



Commercial



Water Recycle



Pharmaceutical



Food
& Beverage

BENEFITS

Better Filtrate Clarity: Typical sand/anthracite filter beds have a 12 to 15 micron nominal filter rating. **ZEOSORB**® typically would have a nominal filter rating of less than 3 microns. This property greatly reduces the effluent turbidity, generally measured in national turbidity units (NTUs).

Increased flow rate in gravity System: In a sand/anthracite filter media system the flow rate is typically 3 to 5 m/h. In a **ZEOSORB**® filter media system, the flow rate is typically in the 10 m/h range.

Increased flow rate in pressure vessel systems: In a sand/anthracite pressure vessel filter system the flow rates are typically 15 to 17 m/h. In a **ZEOSORB**® pressure vessel filter system the flow rates are typically in the 15 to 35 (and sometimes 48) m/h range.

Lower capital requirement to increase Filtration Capacity: Generally, the capacity of a filter plant can be doubled with no increase in the plant by switching the filter media to **ZEOSORB**®

Fewer Backwash cycles: **ZEOSORB**® requires only one half of the backwash cycles that are required by sand/anthracite.

Less Backwash water: The fewer backwash cycles generally cut the amount of backwash water by one third to one half. This means treating less backwash water and greater plant capacity.

Greater Loading due to greater surface area: **ZEOSORB**® generally has 6 to 7 times the surface area as sand. This makes **ZEOSORB**® a much better filter media with greater holding capacity.

Long media bed life: The anticipated filter bed life of **ZEOSORB**® is 10 yrs.

Land application of spent ZEOSORB media: Under most conditions, **ZEOSORB**® filter bed can be applied to lawns and gardens as soil amendments.

Simpler Handling: **ZEOSORB**®, monomedia beds simplify materials handling, shipments and bed loading.

Better Cleaning: Active, dynamic, bed tumbling and mixing during backwash efficiently cleans bed granules.



- FILTERSORB**
- FILTRATION**
- ADSORPTION INSTANT**
- PRODUCTS OXY**
- TREATMENT SYSTEMS**







TECHNICAL SPECIFICATIONS

Appearance	Pale green/grey	
Filtration (Nominal)	< 3 micron	
Porosity	24 - 32 %	
Particle Size	0.6-1.5 mm	
	1.5-2.5 mm	
Mesh size	18 x 35	
	14 x 30	
Water Retention	Up to 50%	
Service flow rate	15 – 48 m/h	
Backwash flow rate	25 – 50 m/h	
Bulk Density	SI	820 Kg/m ³
	US	51.2 lb/ft ³
Backwash flow rate	25 – 50 m/h	
Bed Depth	Pools	400 - 1000 mm
	Others	800 - 1200 mm

Flow rate, Backwash Guidelines

For pressure vessels, a 36" bed depth is generally used with under gravel, plus approximately 30% freeboard, much less than to multimedia beds. The optimum service flow rate for pressure vessels ranges from 29 to greater than 48 m/h of bed area, depending on the water filtration application. For example, use 29 m/h for RO and GAC pre-filtration; use 37 m/h to achieve low turbidity well water, surface water and for industrial projects; and 44 to 48 m/h rate to get high water volume for projects with lower filtration requirements.

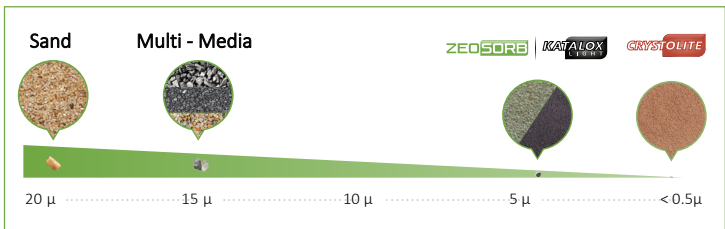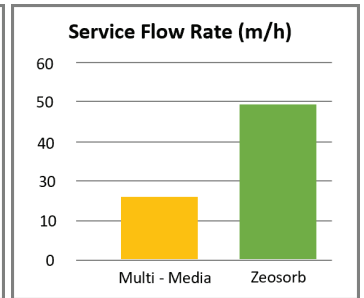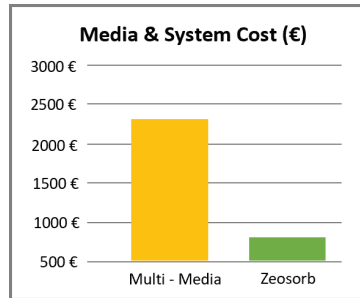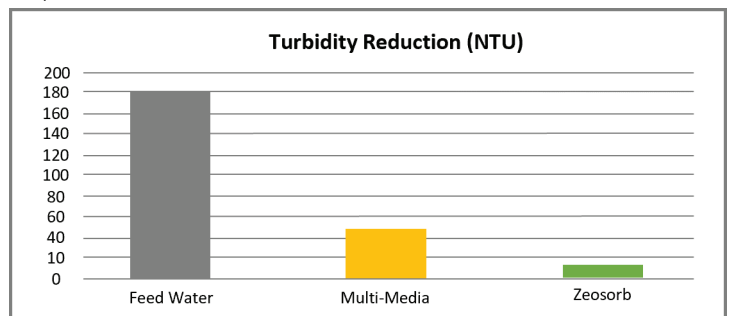

Disclaimer : The information in this publication is based on reliable data and is provided in good faith, without warranty or performance guarantee, as product use conditions are beyond our control. Coastal Water Filters, Inc does not offer express or implied warranties, including merchantability or fitness for a specific purpose. Users should assess product suitability and performance with their equipment. Specifications may change without notice. Please note that the filter media in this brochure do not eliminate bacteria. Do not use our products with microbiologically unsafe or unknown-quality water without proper disinfection. Coastal Water Filters, Inc, is not liable for consequential or incidental damages, such as lost profits from product use.



Standard Packaging

Packaging	Weight of product	Quantity/ pallet	Gross Wt./ pallet	Certification
Bag (30 L)	25 kg	40	1025 kg	NSF/ANSI/ CAN 61 & 372
Bulk Bag (1200 L)	1000 kg	1	1025 kg	

★ Other packaging can be considered on request



Distributed by:
COASTAL WATER FILTERS
Tel. 239-398-0967
info@coastalwaterfilters.com